

Description

The ACE3401 is the P-Channel logic enhancement mode power field effect transistors are produced using high cell density, DMOS trench technology.

This high density process is especially tailored to minimize on-state resistance.

These devices are particularly suited for low voltage application such as cellular phone and notebook computer power management and Battery powered circuits, and low in-line power loss are needed in a very small outline surface mount package.

Features

- -30V/-4.0A, $R_{DS(ON)}=55\text{m}\Omega$ @ $V_{GS}=-10\text{V}$
- -30V/-3.2A, $R_{DS(ON)}=65\text{m}\Omega$ @ $V_{GS}=-4.5\text{V}$
- -30V/-1.2A, $R_{DS(ON)}=75\text{m}\Omega$ @ $V_{GS}=-2.5\text{V}$
- Super high density cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability
- SOT-23-3L package design

Application

- Power Management in Note book
- Portable Equipment
- Battery Powered System
- Load Switch
- DSC
- LCD Display inverter


Absolute Maximum Ratings

($T_A=25^\circ\text{C}$ Unless otherwise noted)


Parameter	Symbol	Typical	Unit
Drain-Source Voltage	V_{DSS}	-30	V
Gate-Source Voltage	V_{GSS}	± 12	V
Continuous Drain Current ($T_J=150^\circ\text{C}$)	I_D	-40	A
		-3.2	
Pulsed Drain Current	I_{DM}	-15	A
Continuous Source Current (Diode Conduction)	I_S	-1.0	A
Power Dissipation	P_D	1.25	W
		0.8	
Operating Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55/150	$^\circ\text{C}$
Thermal Resistance-Junction to Ambient	$R_{\theta JA}$	120	$^\circ\text{C}/\text{W}$

Packaging Type

SOT-23-3

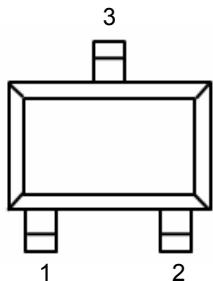


Pin	Description
1	Gate
2	Source
3	Drain

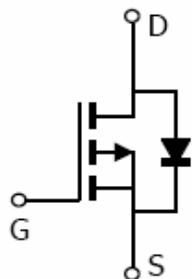

Ordering information

Selection Guide

ACE3401 XX + H

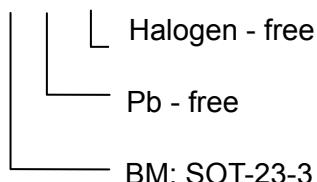


Electrical Characteristics

(TA=25°C, Unless otherwise noted)


Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} =0V, I _D =-250uA	-30			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250uA	-0.4		-1.0	
Gate Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±12V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-24V, V _{GS} =0V			-1	uA
		V _{DS} =-24V, V _{GS} =0V T _J =55°C			-10	
On-State Drain Current	I _{D(ON)}	V _{DS} ≤-5V, V _{GS} =-10V	-10			A
Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} =-10V, I _D =-4.0A		0.045	0.055	Ω
		V _{GS} =-4.5V, I _D =-3.2A		0.050	0.065	
		V _{GS} =-2.5V, I _D =-1.2A		0.060	0.075	
Forward Transconductance	G _{fs}	V _{DS} =-5.0V, I _D =-4.0A		10		S
Diode Forward Voltage	V _{SD}	I _S =-1.0A, V _{GS} =0V		-0.8	-1.2	V
Dynamic						
Total Gate Charge	Q _g	V _{DS} =-15V, V _{GS} =-10V, I _D ≡-4.0A		14	21	nC
Gate-Source Charge	Q _{gs}			1.9		
Gate-Drain Charge	Q _{gd}			3.7		
Input Capacitance	C _{iss}	V _{DS} =-15V, V _{GS} =0V, f=1MHz		540		pF
Output Capacitance	C _{oss}			131		
Reverse Transfer Capacitance	C _{rss}			105		
Turn-On Time	t _{d(on)}	V _{DD} =-15V, R _L =15Ω I _D ≡-1.0A, V _{GEN} =-10V R _G =6Ω		10	15	ns
	t _r			15	25	
Turn-Off Time	t _{d(off)}			31	50	
	t _r			20	30	

Typical Characteristics


Output Characteristics

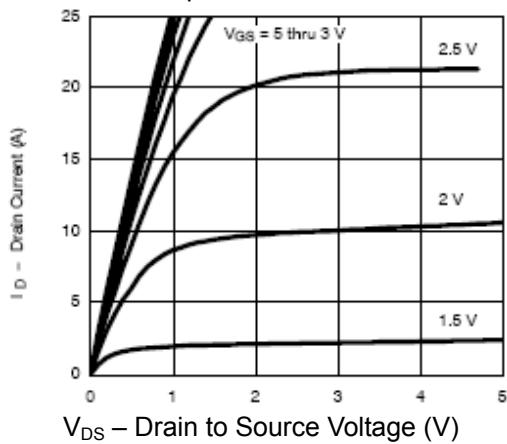


Transfer Characteristics

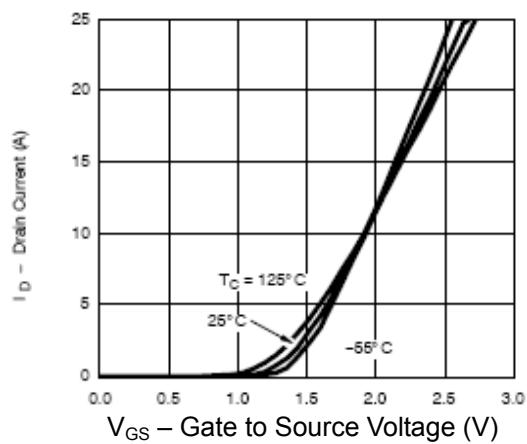





On-Resistance vs. Drain Current

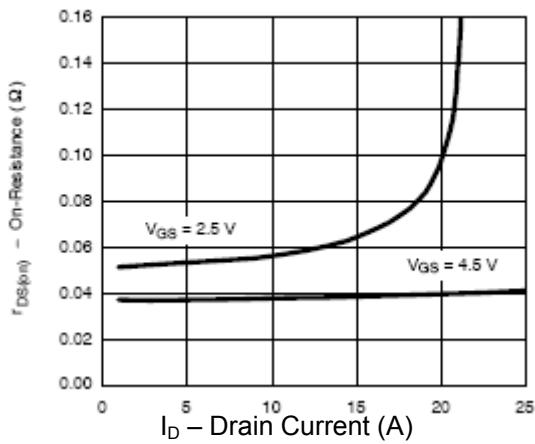



Capacitance

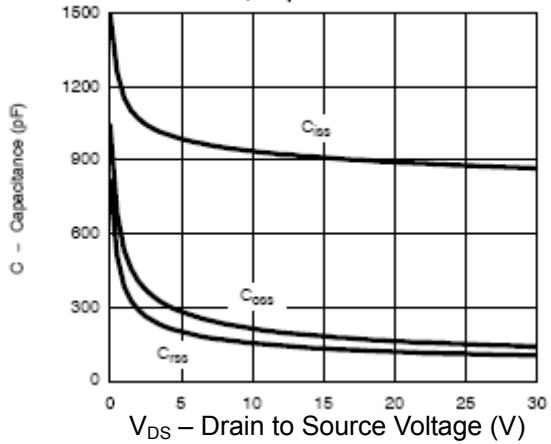


Typical Characteristics

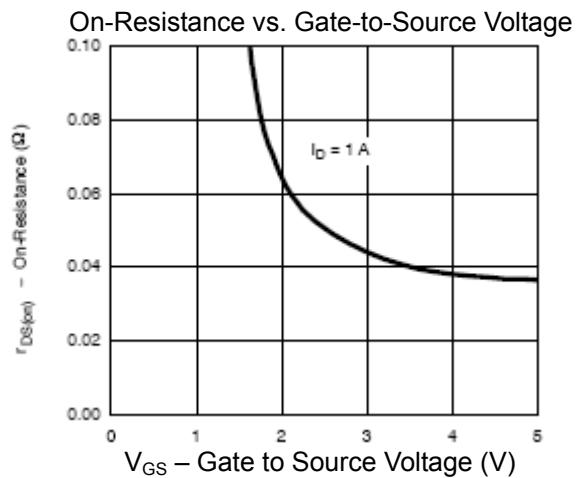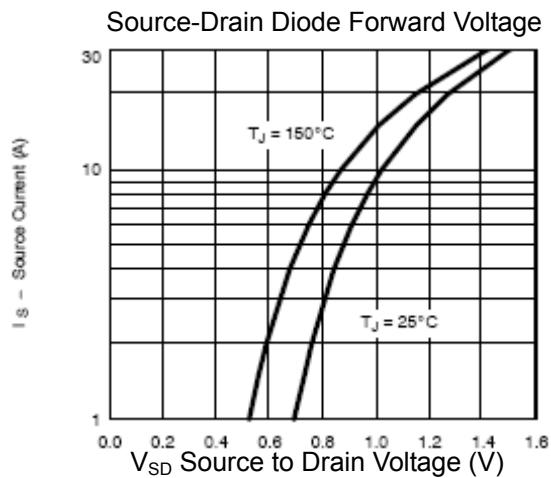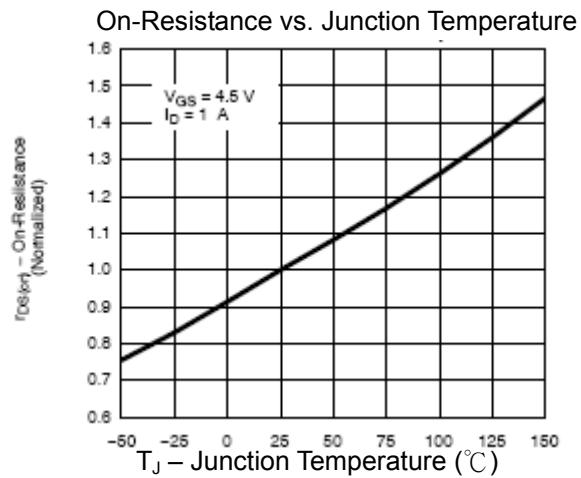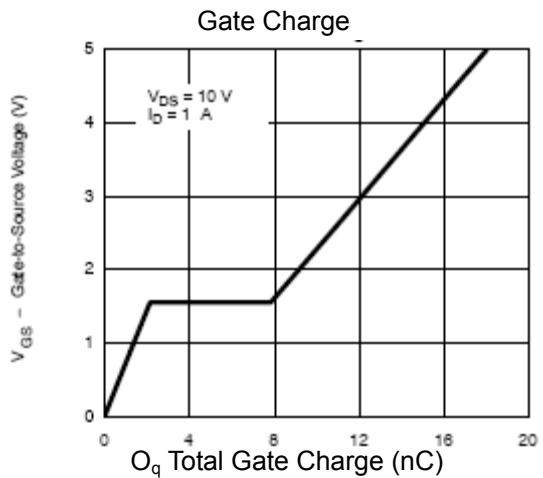

Typical Characteristics

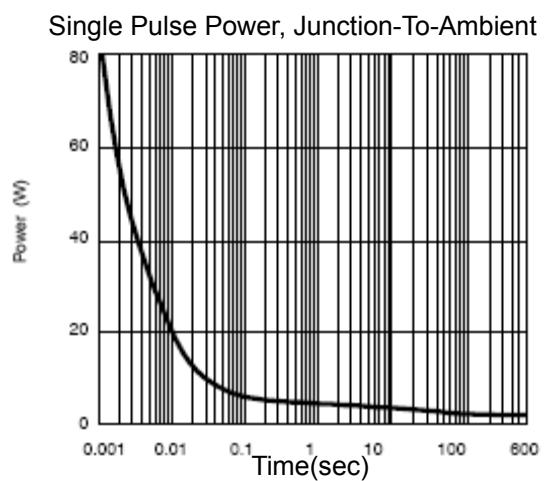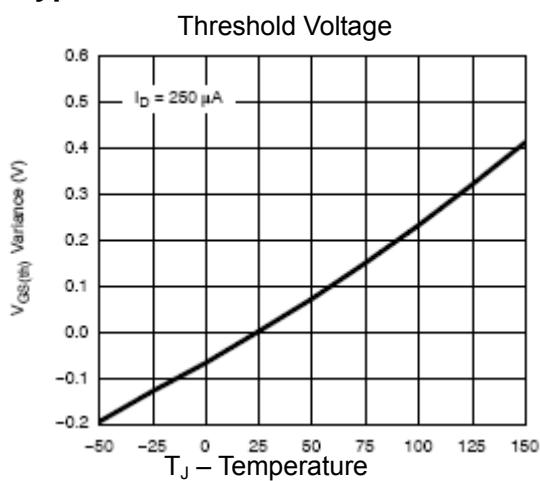


Normalized Thermal Transient Impedance, Junction-to-Foot

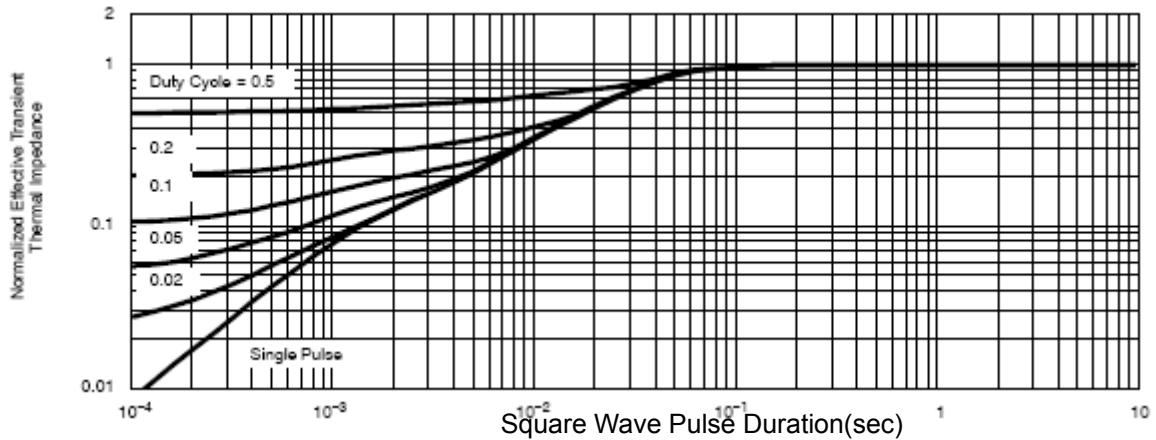

Packing Information

SOT-23-3

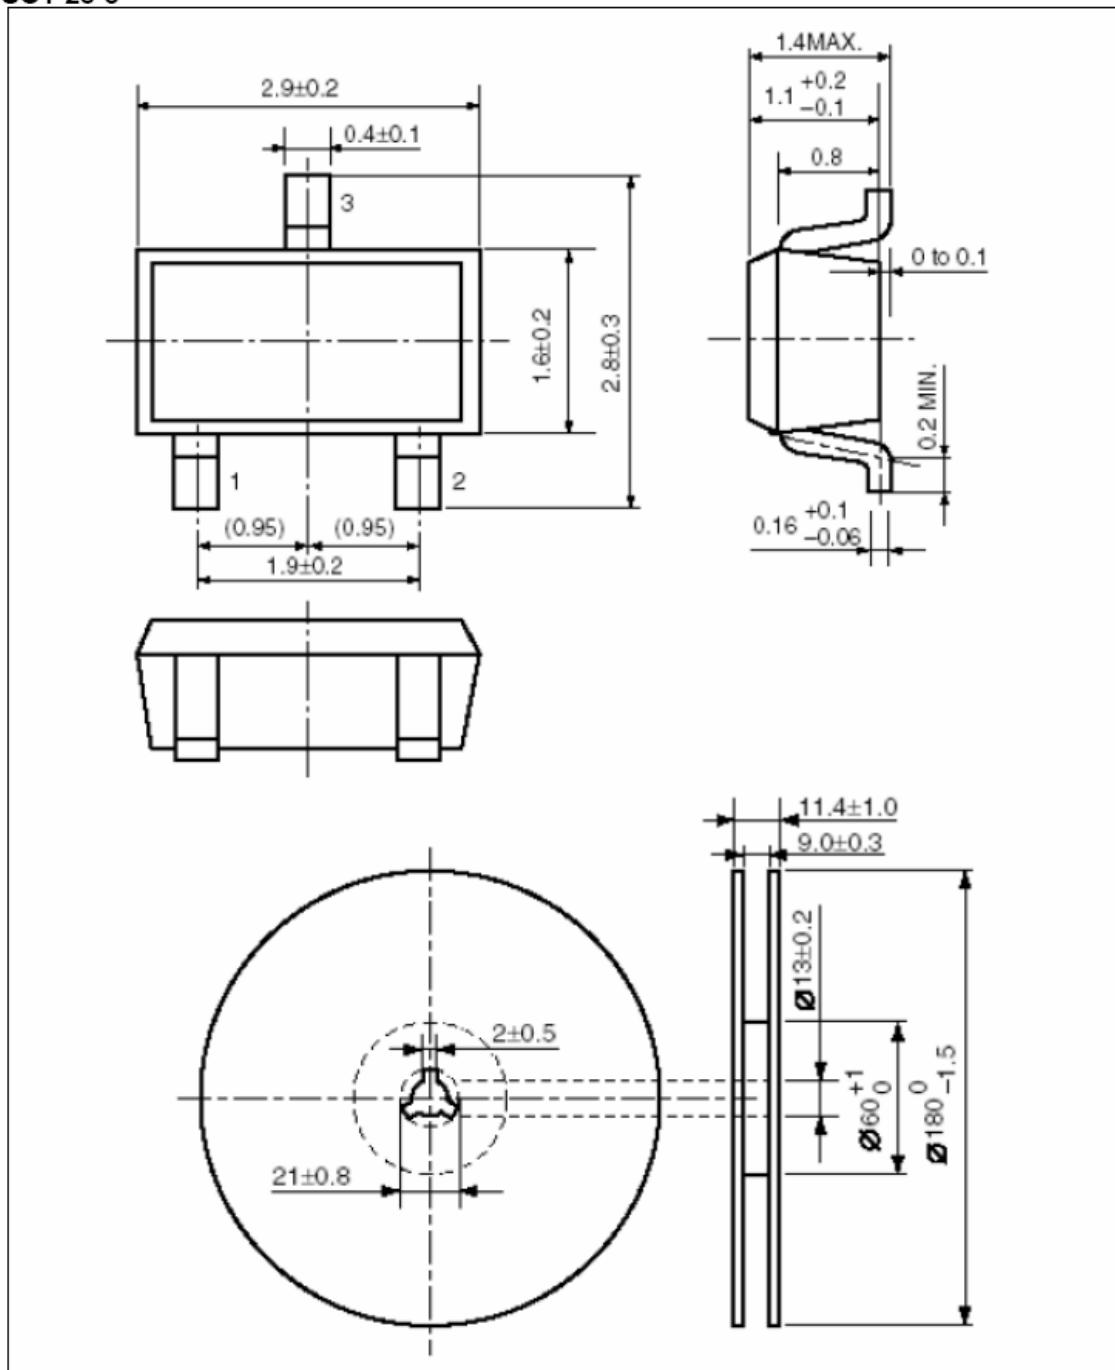

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Electronics Co., LTD. As sued herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.