

FEATURES

- Frequency Range: 3580 - 3620 MHz
- Step Size: 500 KHz
- PLL-24H - Style Package

APPLICATIONS

- Telecommunications
- Satellite Communication

PERFORMANCE SPECIFICATIONS

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Frequency Range	3580 - 3620	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-102	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Sideband Spurs (typ.)	-70	dBc
Power Output	0±3	dBm
Load Impedance	50	Ω
Step Size	500	kHz
Charge Pump Output Current	2500	μA
Switching Speed (typ., adjacent channel)	1.5	mSec
Startup Lock Time (typ.)	1.5	mSec
Operating Temperature Range	-40 to 85	°C
Package Style	PLL-24H	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	31	mA

All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES


- AN-107 : How to Solder Z-COMM VCOs / PLLs
- AN-202 : PLL Functional Description

NOTES:


Reference Oscillator Signal: 5 MHz f_{osc} <math>< 100</math> MHz
Frequency Synthesizer: Analog Devices - ADF4106

Prescaler: 32

VCO TUNING CURVE, typ.

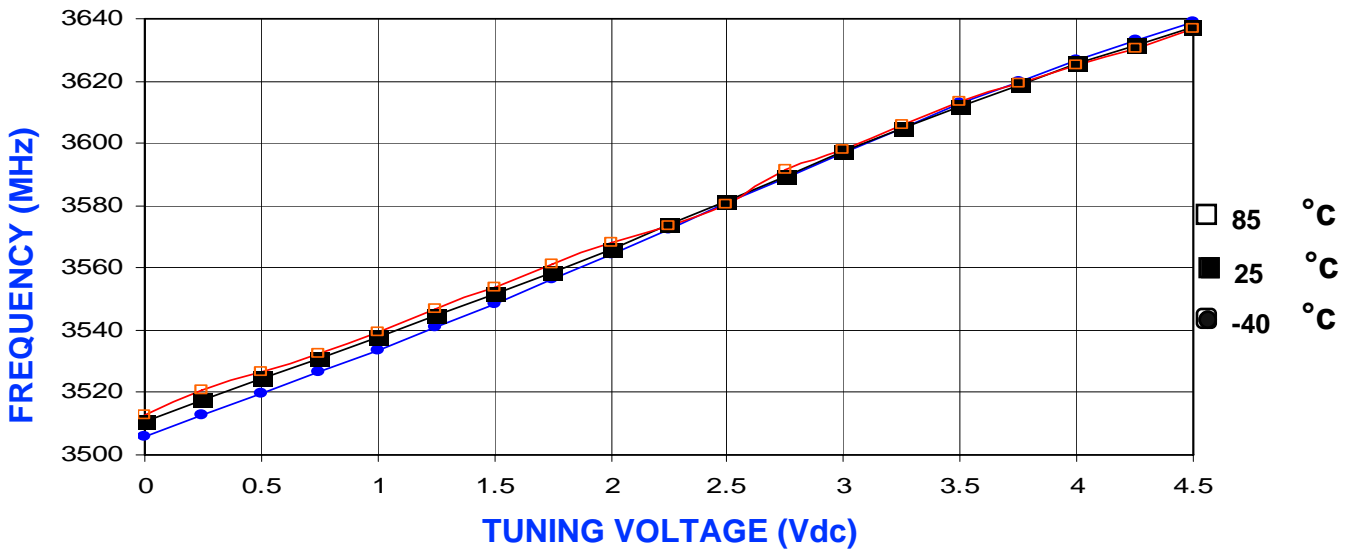

VCO POWER CURVE, typ.

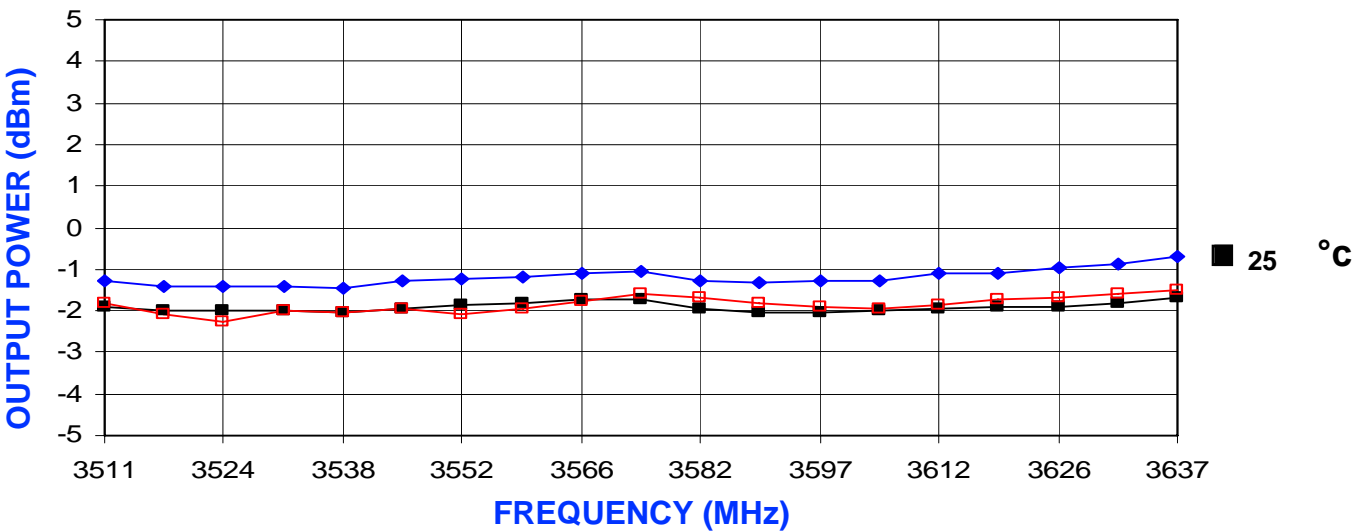

PHYSICAL DIMENSIONS

