


(2,54mm) .100"

SNT, MNT, JL, 2SN, PK, SNM SERIES

SHUNTS & JUMPERS


SPECIFICATIONS

SNT
 For complete specifications see www.samtec.com?SNT
Insulator Material: Glass Filled Polyester
Contact Material: Phosphor Bronze
Current Rating: 2.5A
Operating Temp Range: -40°C to +90°C
Contact Resistance: 5 mΩ max
Insertion Depth: (4,32mm) .170" min.
Lead Size accepted: (0,64mm) .025" SQ
Insertion Force: (Single contact only) 33oz (9,17N) average
Withdrawal Force: (Single contact only) 27oz (7,51N) average
RoHS Compliant: Yes

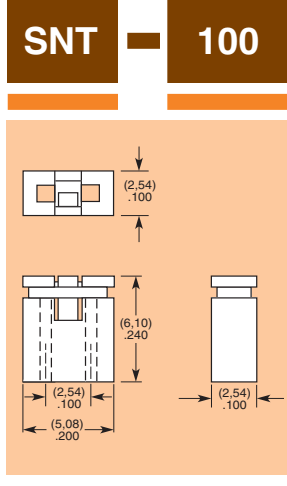


- 100**
- BODY COLOR**
- BK = Black
 - OR = Orange
 - RD = Red
 - BL = Blue
 - YW = Yellow

- PLATING OPTION**
- G = 10μ" (0,25μm) Gold
 - T = Tin
- Note:** Other Gold plating options available. Contact Samtec.

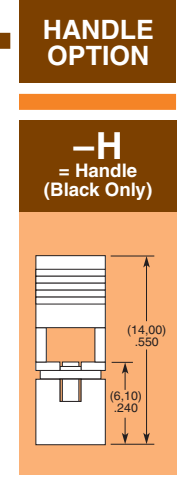

MNT
 For complete specifications see www.samtec.com?MNT
 Same as SNT except:
Current Rating: 2A @ 80°C ambient
Working Voltage: 675 VAC

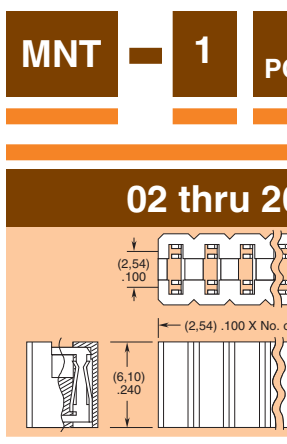


- BODY COLOR**
- BK = Black




- PLATING OPTION**
- G = 10μ" (0,25μm) Gold
 - T = Tin
- Note:** Some lengths, styles and options are non-standard, non-returnable.

SNT/MNT mates with: TSW, MTSW, TLW, DW, EW, ZW, HW, TSM


2SN
 For complete specifications see www.samtec.com?2SN
 Same as SNT except:
Insertion Depth: (2,29mm) .090" minimum
Lead Size accepted: (0,51mm) .020" SQ
2SN mates with: TMMH, TMM, MTMM, MMT, TW, LTMM, ZLTMM, TMSH, TSH, EHT



SNM
 For complete specifications see www.samtec.com?SNM
 Same as SNT except:
Contact Resistance: 10 mΩ max
Insertion Depth: (3,43mm) .135" minimum
Lead Size accepted: (0,46mm) .018" SQ
SNM mates with: TMS, MTMS, DWM

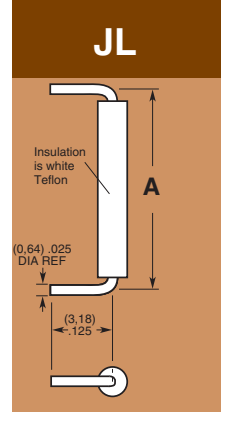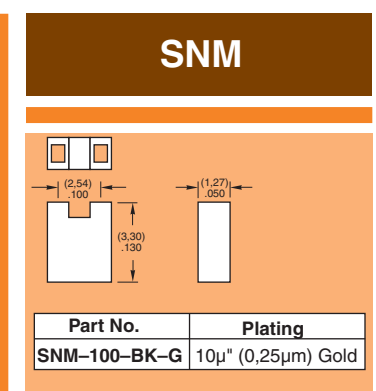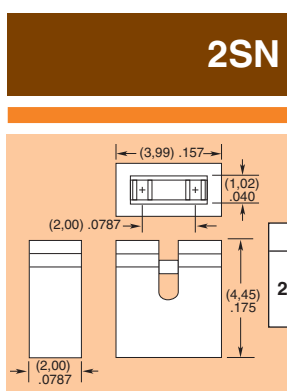

Part No.	A
JL-100-25-T	(2,54) .100
JL-250-25-T	(6,35) .250
JL-300-25-T	(7,62) .300
JL-400-25-T	(10,16) .400
JL-500-25-T	(12,70) .500
JL-600-25-T	(15,24) .600
JL-1000-25-T	(25,40) 1.000



Part No.	A	B
PK-01-06	(0,64) .025 SQ	(5,84) .230
PK-01-07	(0,51) .020 SQ	(3,18) .125

-06 polarizes: SSW, SSQ, ESW, ESQ, IDSS, IDSD, SSM
-07 polarizes: SMM, TCSD

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM