



High Quality Power Cord


UL Certificated




RoHS
Compliant

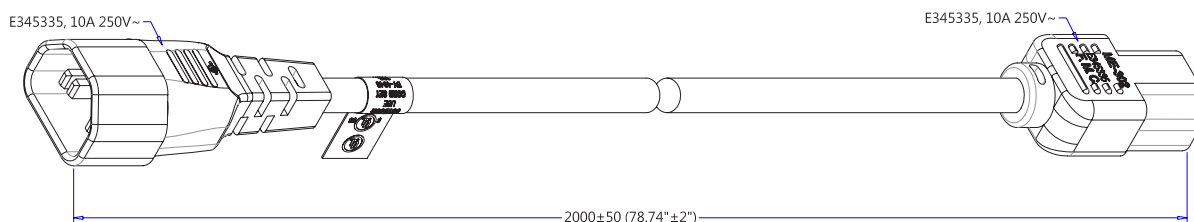

FM-7 (IEC 60320, C14)
(Dimensions of Plug Face)

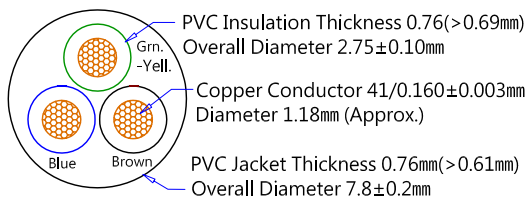

SJT 18AWGx3C
(Wire Cross-Section)



ME-302 (IEC 60320, C13, 10A 250V~)
(Dimensions of Connector Face)

Dimensions : Millimetres

Plug Component		
Colour	Component	Qty
35P (Black)	FM-7 (IEC 60320, C14, 10A, 250V)	1
Nickel-plated	2.0 × 4.0 (GEM 98672-1) 2.0 × 4.0 Computer Solid Blades	3
Black	GEM 8671P (Computer 2×4 Serial Housing)	1

Dimension		
Strip	ROJ	Colour
6 +1/-0	20 ±2	Brown (L)
6 +1/-0	20 ±2	Blue (N)
6 +1/-0	20 ±2	Green-Yellow (E)

Wire Styles

SJT 18AWGx3C
(CEE Cord)
60°C Black
Length : 2,000mm ±50mm
78.74" ±2"

Connector Component		
Instruction	Qty.	Colour
ME-302 (IEC 60320, C13, 10A, 250V)	1	35p (Black)
2.0 × 4.0 GEM 98740BS-0 (#16-18) Receptacle Terminal	3	Brass-Natural
GA005-5 (2.0 × 4.0 Serial Housing)	1	Off-White

Dimensions		
ROJ	Strip	Colour
16±1	5 +1/-0	Brown (L)
16±1	5 +1/-0	Blue (N)
16±1	5 +1/-0	Green-Yellow (E)

Dimensions : Millimetres

www.element14.com
www.farnell.com
www.newark.com

