



226PBM016M

RADIAL LEAD BI-POLAR/ NON-POLAR

Parts are RoHS compliant

Date code when parts became RoHS: 23

APPLICATIONS: audio coupling, speaker crossover circuits

ELECTRICAL SPECIFICATIONS

Capacitance: 22 μ F

Dissipation Factor: 0.2 Max at 120 Hz and 20°C

Temperature Range: -40°C to +85°C

ESR: 15.057 Ohms Max at 20°C and 120 Hz

Impedance: N/A

Tolerance: -20 %, +20 %

WVDC: 16 Volts DC

SVDC: 20 Volts DC

Ripple Current: 47 mA at 120 Hz and 85°C

Impedance Ratios:-25°C/20°C 2 and -40°C/20°C - 4

Leakage Current: .05CV or 10 μ A, whichever is greater
18 μ A after 2 Minutes

Load Life: 1000 hours at 85°C with 100 % of rated voltage and with 0 % of rated ripple current

Capacitance Change: \leq 20% of initial measured value

Dissipation Factor: \leq 200% of maximum specified value

Leakage Current: \leq 100% of maximum specified value

Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.75	1	1	1.45	1.7	1.7

Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
1.8	1.5	1.3	1.4	1	1	0	0

PHYSICAL DIMENSIONS

Diameter (D): 5 mm + 0.5 mm

Length (L): 7 mm + 1 mm


Lead Spacing (S): 2 mm +/- 0.5 mm

Coating: BlackPET sleeving

Lead Wire Diameter (d): 0.45 mm +/- 0.05 mm

Lead Length: 15 mm +/- MIN mm

Lead Finish: Matte Tin

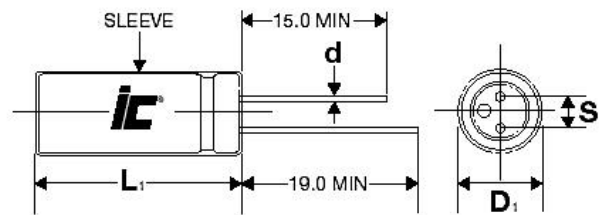

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.illcap.com.hk
© Copyright 2017 Illinois Capacitor. A division of Cornell Dubilier, All Rights Reserved